



**Catalogue**  
**CATERING**  
**Chapter**  
**REFRIGERATION**

**Model**  
 CMKP-201D PAS S.P.CAL SUELO 230V 1N 50/6

19048102

04/03/2019

**MIXED BLAST CHILLING CELL, CMKP-201-D**

**SPECIFICATIONS**

Pass-through blast chiller and freezer cell, with separate doors for entry and exit.


Inside and outside made of high quality austenitic stainless steel. 100 mm thick isolation. Isolation by means of injected 40 kg/m<sup>3</sup> polyurethane, 20 % above the market average, particularly for freezing performance and with a noticeable reduction in consumption. Forced draught cooling system with optimized air circulation.

Electronic and digital control of defrosting temperature. Opened door delay alarm. HACCP tracking system with alarm and temperature log. An optional printer can be installed to print data. Bottom: 100 mm thick bottom board with 40 kg/m<sup>3</sup> injected polyurethane isolation.

Enhanced model, ready to work with condenser units with high refrigeration power. Ready to install with tropicalized remote cooling unit. Ready to install with hermetically sealed compressor/scroll/semi hermetic with ventilated condenser. Suitable to work at a room temperature up to 43 °C and 65% humidity.

Trolley size: 20 GN-1/1  
 Production Kg/cycle of refrigeration: 105 Kg  
 Production Kg/cycle of freezing: 70 Kg

**DIMENSIONS**



|            |                      |                |                      |
|------------|----------------------|----------------|----------------------|
| X Width    | 1530 mm              | X Gross width  | 2310 mm              |
| Y Depth    | 1255 mm              | Y Gross depth  | 1430 mm              |
| Z Height   | 2220 mm              | Z Gross height | 1750 mm              |
| Net Weight | 382,0 kg             | Gross Weight   | 410,0 kg             |
| Net volume | 4,118 m <sup>3</sup> | Gross volume   | 5,781 m <sup>3</sup> |

**ELECTRICITY TECHNICAL SPECIFICATIONS**

|                    |           |
|--------------------|-----------|
| Electric power     | 0,850 kW  |
| Voltage            | 230V - 1N |
| Electric frequency | 50/60Hz   |

**UNDERTAKEN TECHNICAL SPECIFICATIONS**

|                           |              |
|---------------------------|--------------|
| Single-phase 230V wiring  | 2X2,5+T - 4A |
| Three-phase +N 40V wiring | 4X1,5 +T -4A |
| Drain 1 diameter          | 40           |




Catalogue  
**CATERING**

Chapter  
**REFRIGERATION**

Model  
**CMKP-201D PAS S.P.CAL SUELO 230V 1N 50/6**

19048102

04/03/2019

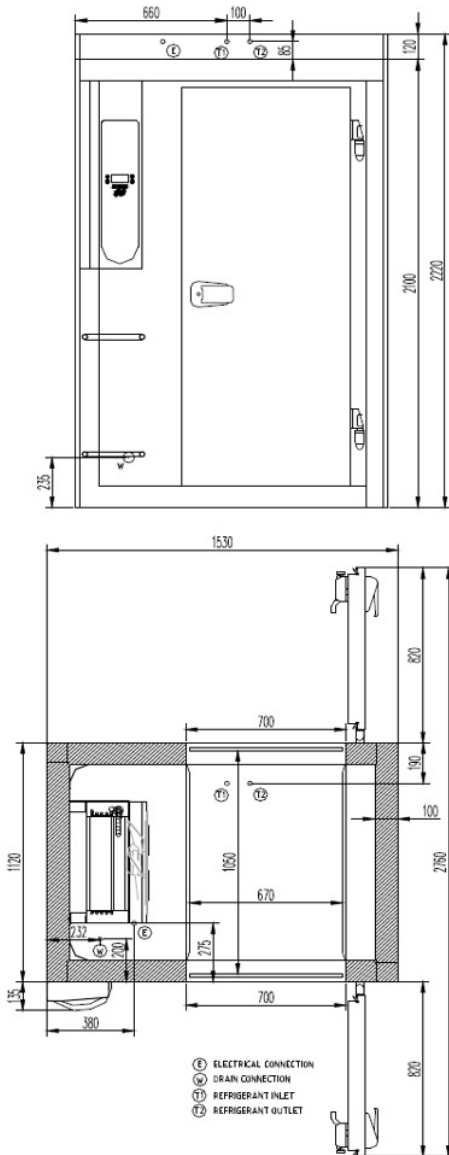

| MODELO / MODEL                                    |                         | CMK-201 D            | CMKP-201 D           |
|---|-------------------------|----------------------|----------------------|
| Dimensiones Exteriores<br>External Dimensions     | mm                      | 1530x(1120+135)x2220 | 1530x(1120+135)x2220 |
| Dimensiones Interiores<br>Internal Dimensions     | mm                      | 670x1050x1900        | 670x1050x1900        |
| Tipo Abatidor<br>Type Blast Chiller               |                         | Mixto                | Mixto                |
| Profundidad con puerta 90°<br>Depth with 90° door | mm                      | 2760                 | 2760                 |
| Clase Climática<br>Climatic class                 |                         | T                    | T                    |
| Espesor aislamiento<br>Thickness                  | mm                      | 100                  | 100                  |
| Medidas hueco puerta<br>door opening measures     | mm                      | 1800x700             | 1800x700             |
| Ciclo refrigeración<br>Chilling cycle             | °C                      | +90/+3               | +90/+3               |
| Ciclo Congelación<br>Freezing cycle               | °C                      | +90/-18              | +90/-18              |
| Capacidad Abatimiento<br>Chilling capacity        | 90'                     | Kg                   | 70                   |
| Capacidad Congelación<br>Freezing capacity        | 240'                    | Kg                   | 48                   |
| Alimentación eléctrica<br>Electric Power supply   | V/~-Hz                  | 230/1-50/60          | 230/1-50/60          |
| Intensidad Máxima<br>Max. Absorbed current        | A                       | 3.3                  | 3.7                  |
| Potencia eléctrica<br>Input electric Power        | W                       | 550                  | 550                  |
| Dimensiones embalado<br>Packing dimensions        | LxPxH mm                | 2310x1360x1710       | 2310x1360x1710       |
| Volumen bruto exterior<br>Total Volume external   | m <sup>3</sup>          | 5.44                 | 5.44                 |
| Peso<br>Weigh                                     | NETO/NET<br>BRUTO/GROSS | Kg                   | 380<br>410           |

| GRUPPO REMOTO / REMOTE UNIT                    |        | UCC-424            | UCC-528            |
|--|--------|--------------------|--------------------|
| Potencia / Rated output                        | HP     | 4                  | 5                  |
| Refrigerante / Refrigerant                     |        | R404A              | R404A              |
| Potencia Frigorífica / Refrigeration Capacity  | W      | 5970               | 6950               |
| Alimentación eléctrica / Electric power supply | V/~-Hz | 400/3/50- 460/3/60 | 400/3/50- 460/3/60 |
| Potencia eléctrica / Input electric power      | W      | 4250               | 4980               |
| Intensidad Máxima / Max. Absorbed current      | A      | 11                 | 14.5               |
| Peso / Weight                                  | Kg     | 135                | 139                |
| Dimensiones / Dimensions                       | mm     | 1100x805x650       | 1100x805x650       |

| CONNECTIONS / CONEXIONES                  |                      |                   |                   |
|---|----------------------|-------------------|-------------------|
| Conexiones eléctricas / Cables electrical | n° x mm <sup>2</sup> | 3x2.5/ 5x4/ 5x1.5 | 3x2.5/ 5x4/ 5x1.5 |
| Línea de líquido / Liquid tubes           | D (mm)               | 15.8mm- 5/8"      | 15.8mm- 5/8"      |
| Línea de gas / Gas tubes                  | D (mm)               | 28.6mm- 1-1/8"    | 35mm- 1-3/8"      |