



Catalogue
CATERING
Chapter
REFRIGERATION

Model
CMKP-202D PAS S.P.CAL SUELO 400V 3N 50Hz

19048113

04/03/2019

MIXED BLAST CHILLING CELL, CMKP-202-D

SPECIFICATIONS

Pass-through blast chiller and freezer cell, with separate doors for entry and exit.


Inside and outside made of high quality austenitic stainless steel. 100 mm thick isolation. Isolation by means of injected 40 kg/m³ polyurethane, 20 % above the market average, particularly for freezing performance and with a noticeable reduction in consumption. Forced draught cooling system with optimized air circulation.

Electronic and digital control of defrosting temperature. Opened door delay alarm. HACCP tracking system with alarm and temperature log. An optional printer can be installed to print data. Bottom: 100 mm thick bottom board with 40 kg/m³ injected polyurethane isolation.

Enhanced model, ready to work with condenser units with high refrigeration power. Ready to install with tropicalized remote cooling unit. Ready to install with hermetically sealed compressor/scroll/semi hermetic with ventilated condenser. Suitable to work at a room temperature up to 43 °C and 65% humidity.

Trolley size: 20 GN-2/1
 Production Kg/cycle of refrigeration: 210 Kg
 Production Kg/cycle of freezing: 135 Kg

DIMENSIONS



| | | | |
|------------|----------------------|----------------|----------------------|
| X Width | 1720 mm | X Gross width | 2310 mm |
| Y Depth | 1445 mm | Y Gross depth | 1640 mm |
| Z Height | 2220 mm | Z Gross height | 1940 mm |
| Net Weight | 408,0 kg | Gross Weight | 440,0 kg |
| Net volume | 5,491 m ³ | Gross volume | 7,349 m ³ |

ELECTRICITY TECHNICAL SPECIFICATIONS

| | |
|--------------------|-----------|
| Electric power | 1,050 kW |
| Voltage | 400V - 3N |
| Electric frequency | 50Hz |

COLD TECHNICAL SPECIFICATIONS

| | |
|---------------|---|
| Climate class | 3 |
|---------------|---|

UNDERTAKEN TECHNICAL SPECIFICATIONS

| | |
|---------------------------|--------------|
| Three-phase +N 40V wiring | 4X1.5+T - 6A |
| Drain 1 diameter | 40 |





Catalogue
CATERING

Chapter
REFRIGERATION

Model
CMKP-202D PAS S.P.CAL SUELO 400V 3N 50Hz

19048113

04/03/2019

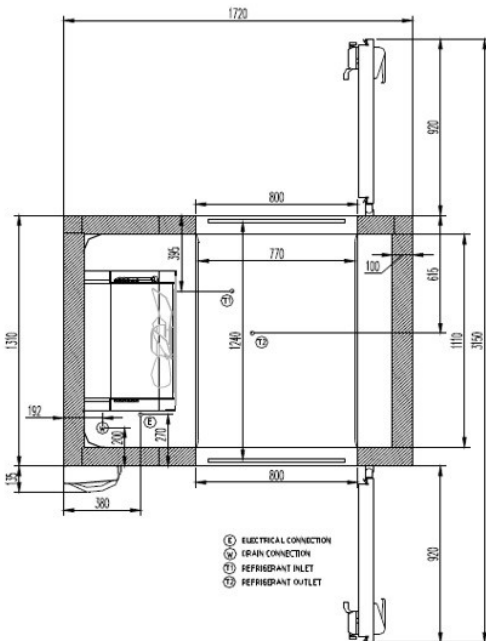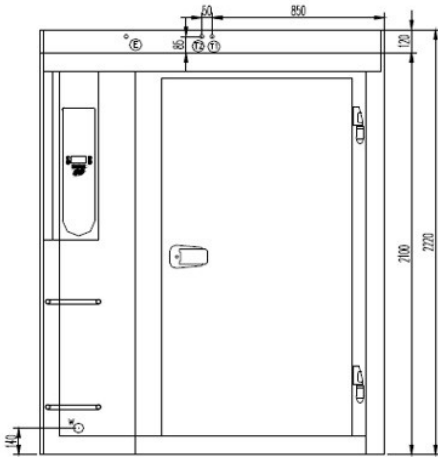

| MODELO / MODEL | | CMK-202D | CMKP-202 D |
|---|-------------------------|----------------------|----------------------|
| Dimensiones Exteriores External Dimensions | mm | 1720x(1310+135)x2220 | 1720x(1310+135)x2220 |
| Dimensiones Interiores Internal Dimensions | mm | 770x1240x1900 | 770x1240x1900 |
| Tipo Abatidor Type Blast Chiller | | Mixto | Mixto |
| Profundidad con puerta 90° Depth with 90° door | mm | 3150 | 3150 |
| Clase Climatica Climatic class | | T | T |
| Espesor aislamiento Thickness | mm | 100 | 100 |
| Medidas hueco puerta door opening measures | mm | 1800x800 | 1800x800 |
| Ciclo refrigeración Chilling cycle | °C | +90/+3 | +90/+3 |
| Ciclo Congelación Freezing cycle | °C | +90/-18 | +90/-18 |
| Capacidad Abatimiento Chilling capacity | 90' | Kg 150 | Kg 210 |
| Capacidad Congelación Freezing capacity | 240' | Kg 100 | Kg 135 |
| Alimentación electrica Electric Power supply | V/~-Hz | 230/1-50/60 | 400/3N-50/60 |
| Intensidad Maxima Max. Absorbed current | A | 2.6 | 4.5 |
| Potencia electrica Input electric Power | W | 850 | 1100 |
| Dimensiones embalado Packing dimensions | mm | 2310x1580x1920 | 2310x1580x1920 |
| Volumen bruto exterior Total Volume external | m ³ | 7.1 | 7.1 |
| Peso Weigh | NETO/NET BRUTO/GROSS | Kg 420 | Kg 440 |

| GRUPPO REMOTO / REMOTE UNIT | | UCC-842 | UCC-1052 |
|--|--------|----------------------|----------------------|
| Potencia / Rated output | HP | 7.5 | 10 |
| Refrigerante / Refrigerant | | R404A | R404A |
| Potencia Frigorifica / Refrigeration Capacity | W | 10530 | 13580 |
| Alimentación eléctrica / Electric power supply | V/~-Hz | 400/3N/50- 460/3N/60 | 400/3N/50- 460/3N/60 |
| Potencia eléctrica / Input electric power | W | 6500 | 8450 |
| Intensidad Máxima / Max. Absorbed current | A | 19.9 | 24.5 |
| Peso / Weight | Kg | 205 | 214 |
| Dimensiones / Dimensions | mm | 1450x850x785 | 1450x850x785 |
| Dimensiones embalado / Packing Dimensions | mm | 1570x955x890 | 1570x955x890 |

CONNECTIONS / CONEXIONES

| Conexiones eléctricas / Cables electrical | n° x mm ² | 3x2.5/ 5x4/ 5x1.5 | 5x2.5/ 5x4/ 5x1.5 |
|---|----------------------|-------------------|-------------------|
| Linea de líquido / Liquid tubes | D (mm) | 19mm- 3/4" | 19mm- 3/4" |
| Linea de gas / Gas tubes | D (mm) | 35mm- 1-3/8" | 35mm- 1-3/8" |

