



**Catalogue**  
**CATERING**  
**Chapter**  
**REFRIGERATION**

**Model**  
 CSK-202 S.P.CAL No 230V 1N 50/60Hz

19048110

04/03/2019

**BLAST CHILLING CELL, CSK-202**

**SPECIFICATIONS**


Inside and outside made of high quality austenitic stainless steel.  
 70 mm thick isolation.  
 Isolation by means of injected 40 kg/m<sup>3</sup> polyurethane, 20 % above the market average and with a noticeable reduction in consumption.  
 Forced draught cooling system with optimized air circulation.

Electronic and digital control of defrosting temperature.  
 Opened door delay alarm.  
 HACCP tracking system with alarm and temperature log. An optional printer can be installed to print data.  
 Bottom: 2 mm thick steel bottom.

Ready to install with tropicalized remote cooling unit.  
 Ready to install with hermetically sealed compressor/scroll/semi hermetic with ventilated condenser.  
 Suitable to work at a room temperature up to 43 °C and 65% humidity.

Trolley size: 20 GN-2/1  
 Production Kg/cycle of refrigeration: 150 Kg

**DIMENSIONS**



X Width	1670 mm	X Gross width	2310 mm
Y Depth	1395 mm	Y Gross depth	1640 mm
Z Height	2120 mm	Z Gross height	1940 mm
Net Weight	408,0 kg	Gross Weight	440,0 kg
Net volume	4,782 m <sup>3</sup>	Gross volume	7,349 m <sup>3</sup>

**ELECTRICITY TECHNICAL SPECIFICATIONS**

Electric power	0,850 kW
Voltage	230V - 1N
Amperage	3,3A
Electric frequency	50/60Hz

**GAS TECHNICAL SPECIFICATIONS**

Gas type	R-404A
----------	--------

**COLD TECHNICAL SPECIFICATIONS**

Climate class	3
---------------	---

**UNDERTAKEN TECHNICAL SPECIFICATIONS**

Single-phase 230V wiring	2X2,5+T - 4A
Three-phase +N 40V wiring	4X1.5+T - 4A
Drain 1 diameter	40





Catalogue  
**CATERING**

Chapter  
**REFRIGERATION**

Model  
**CSK-202 S.P.CAL No 230V 1N 50/60Hz**

19048110

04/03/2019

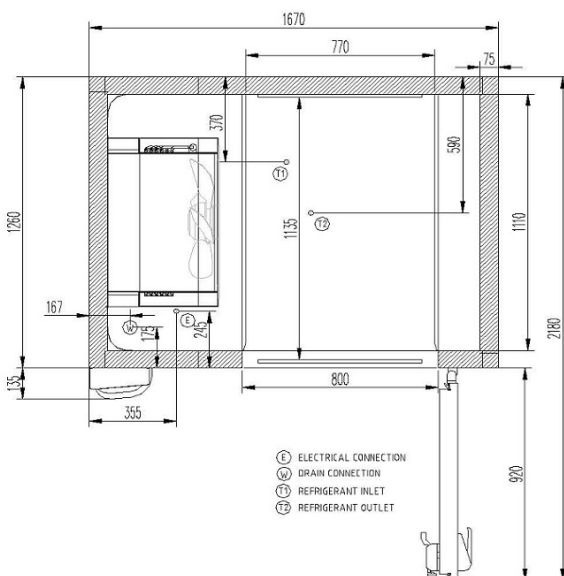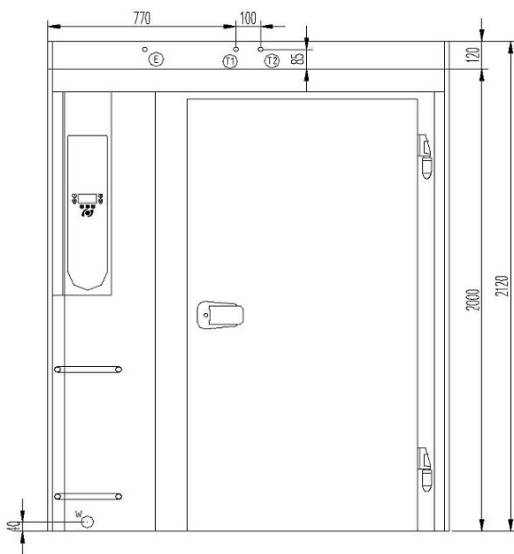

MODELO / MODEL		CSK-202	CSKP-202
Dimensiones Exteriores	mm	1670x(1260+135)x2120	1670x(1260+135)x2120
External Dimensions			
Dimensiones Interiores	mm	770x1135x1900	770x1135x1900
Internal Dimensions			
Tipo Abatidor		Refrigeración	Refrigeración
Type Blast Chiller			
Profundidad con puerta 90°	mm	2180	2180
Depth with 90° door			
Clase Climática		T	T
Climatic class			
Espesor aislamiento	mm	70	70
Thickness			
Medidas hueco puerta	mm	1800x800	1800x800
door opening measures			
Ciclo refrigeración	°C	+90/+3	+90/+3
Chilling cycle			
Capacidad Abatimiento	90° Kg	150	210
Chilling capacity			
Capacidad Abatimiento	60° Kg	120	180
Chilling capacity			
Alimentación eléctrica	V/~-Hz	230/1-50/60	400/3N-50/60
Electric Power supply			
Intensidad Máxima	A	2.6	4.2
Max. Absorbed current			
Potencia eléctrica	W	850	1050
Input electric Power			
Dimensiones embalado	mm	2310x1640x1940	2310x1640x1940
Packing dimensions			
Volumen bruto exterior	m³	7.1	7.1
Total Volume external			
Peso	NETO/NET Kg	420	420
Weight	BRUTO/GROSS Kg	440	440
Suelo		NO	NO
Ground		NO	NO

GRUPPO REMOTO / REMOTE UNIT		UCS-842	UCS-1052
Potencia / Rated output	HP	7.5	10
Refrigerante / Refrigerant		R404A	R404A
Potencia Frigorífica / Refrigeration Capacity	W	10530	13580
Alimentación eléctrica / Electric power supply	V/~-Hz	400/3N/50- 460/3N/60	400/3N/50- 460/3N/60
Potencia eléctrica / Input electric power	W	6500	8450
Intensidad Máxima / Max. Absorbed current	A	19.9	24.5
Peso / Weight	Kg	205	214
Dimensiones / Dimensions	mm	1450x850x785	1450x850x785
Dimensiones embalado / Packing Dimensions	mm	1570x955x890	1570x955x890

**CONNECTIONS / CONEXIONES**

Conexiones eléctricas / Cables electrical	n° x mm²	3x2.5/ 5x4/ 5x1.5	5x2.5/ 5x4/ 5x1.5
Línea de líquido / Liquid tubes	D (mm)	19mm- 3/4"	19mm- 3/4"
Línea de gas / Gas tubes	D (mm)	35mm- 1-3/8"	35mm- 1-3/8"

