



**Catalogue**  
**CATERING**  
**Chapter**  
**REFRIGERATION**

**Model**  
**CMK-201D PAS S.P.CAL SUELO 230V 1N 50/60**

19048101

04/03/2019

**MIXED BLAST CHILLING CELL, CMK-201-D**

**SPECIFICATIONS**

Pass-through blast chiller and freezer cell, with separate doors for entry and exit.

Inside and outside made of high quality austenitic stainless steel. 100 mm thick isolation.

Isolation by means of injected 40 kg/m<sup>3</sup> polyurethane, 20 % above the market average, particularly for freezing performance and with a noticeable reduction in consumption.

Forced draught cooling system with optimized air circulation.

Electronic and digital control of defrosting temperature.

Opened door delay alarm.

HACCP tracking system with alarm and temperature log. An optional printer can be installed to print data.

Bottom: 100 mm thick bottom board with 40 kg/m<sup>3</sup> injected polyurethane isolation.

Ready to install with tropicalized remote cooling unit.

Ready to install with hermetically sealed compressor/scroll/semi hermetic with ventilated condenser.


Suitable to work at a room temperature up to 43 °C and 65% humidity.

Trolley size: 20 GN-1/1

Production Kg/cycle of refrigeration: 70 Kg

Production Kg/cycle of freezing: 48 Kg

**DIMENSIONS**



X Width	1530 mm	X Gross width	2310 mm
Y Depth	1255 mm	Y Gross depth	1430 mm
Z Height	2220 mm	Z Gross height	1750 mm
Net Weight	400,0 kg	Gross Weight	420,0 kg
Net volume	4,118 m <sup>3</sup>	Gross volume	5,781 m <sup>3</sup>

**ELECTRICITY TECHNICAL SPECIFICATIONS**

Electric power	0,850 kW
Voltage	230V - 1N
Electric frequency	50/60Hz

**UNDERTAKEN TECHNICAL SPECIFICATIONS**

Single-phase 230V wiring	2X2,5+T - 4A
Three-phase +N 40V wiring	4X1,5 +T -4A
Drain 1 diameter	40




Catalogue  
**CATERING**

Chapter  
**REFRIGERATION**

Model  
**CMK-201D PAS S.P.CAL SUELO 230V 1N 50/60**

19048101

04/03/2019

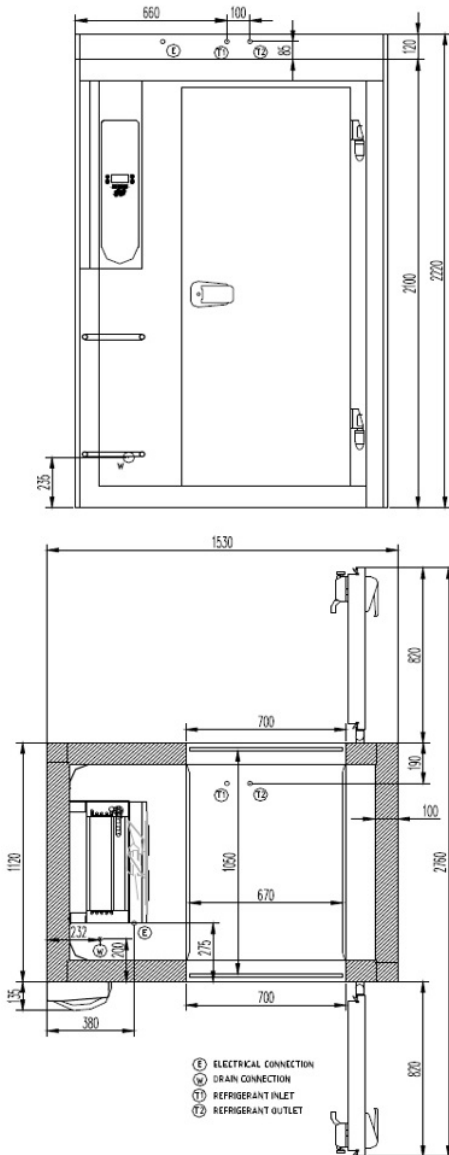

MODELO / MODEL		CMK-201 D	CMKP-201 D
Dimensiones Exteriores External Dimensions	mm	1530x(1120+135)x2220	1530x(1120+135)x2220
Dimensiones Interiores Internal Dimensions	mm	670x1050x1900	670x1050x1900
Tipo Abatidor Type Blast Chiller		Mixto	Mixto
Profundidad con puerta 90° Depth with 90° door	mm	2760	2760
Clase Climática Climatic class		T	T
Espesor aislamiento Thickness	mm	100	100
Medidas hueco puerta door opening measures	mm	1800x700	1800x700
Ciclo refrigeración Chilling cycle	°C	+90/+3	+90/+3
Ciclo Congelación Freezing cycle	°C	+90/-18	+90/-18
Capacidad Abatimiento Chilling capacity	90'	Kg	70
Capacidad Congelación Freezing capacity	240'	Kg	48
Alimentación eléctrica Electric Power supply	V/~-Hz	230/1-50/60	230/1-50/60
Intensidad Máxima Max. Absorbed current	A	3.3	3.7
Potencia eléctrica Input electric Power	W	550	550
Dimensiones embalado Packing dimensions	LxPxH mm	2310x1360x1710	2310x1360x1710
Volumen bruto exterior Total Volume external	m <sup>3</sup>	5.44	5.44
Peso Weigh	NETO/NET BRUTO/GROSS	Kg	380 410

GRUPPO REMOTO / REMOTE UNIT		UCC-424	UCC-528
Potencia / Rated output	HP	4	5
Refrigerante / Refrigerant		R404A	R404A
Potencia Frigorífica / Refrigeration Capacity	W	5970	6950
Alimentación eléctrica / Electric power supply	V/~-Hz	400/3/50- 460/3/60	400/3/50- 460/3/60
Potencia eléctrica / Input electric power	W	4250	4980
Intensidad Máxima / Max. Absorbed current	A	11	14.5
Peso / Weight	Kg	135	139
Dimensiones / Dimensions	mm	1100x805x650	1100x805x650

CONEXIONES / CONEXIONES			
Conexiones eléctricas / Cables electrical	n° x mm <sup>2</sup>	3x2.5/ 5x4/ 5x1.5	3x2.5/ 5x4/ 5x1.5
Línea de líquido / Liquid tubes	D (mm)	15.8mm- 5/8"	15.8mm- 5/8"
Línea de gas / Gas tubes	D (mm)	28.6mm- 1-1/8"	35mm- 1-3/8"