



**Catalogue**  
**CATERING**  
**Chapter**  
**REFRIGERATION**

**Model**  
**CMKP-202 S.P.CAL SUELO 400V 3N 50Hz**

19048107

04/03/2019

**MIXED BLAST CHILLING CELL, CMKP-202**

**SPECIFICATIONS**


Inside and outside made of high quality austenitic stainless steel. 100 mm thick isolation.  
 Isolation by means of injected 40 kg/m3 polyurethane, 20 % above the market average, particularly for freezing performance and with a noticeable reduction in consumption.  
 Forced draught cooling system with optimized air circulation.

Electronic and digital control of defrosting temperature.  
 Opened door delay alarm.  
 HACCP tracking system with alarm and temperature log. An optional printer can be installed to print data.  
 Bottom: 100 mm thick bottom board with 40 kg/m3 injected polyurethane isolation.

Enhanced model, ready to work with condenser units with high refrigeration power.  
 Ready to install with tropicalized remote cooling unit.  
 Ready to install with hermetically sealed compressor/scroll/semi hermetic with ventilated condenser.  
 Suitable to work at a room temperature up to 43 °C and 65% humidity.

Trolley size: 20 GN-2/1  
 Production Kg/cycle of refrigeration: 210 Kg  
 Production Kg/cycle of freezing: 135 Kg

**DIMENSIONS**



X Width	1720 mm	X Gross width	2310 mm
Y Depth	1445 mm	Y Gross depth	1640 mm
Z Height	2220 mm	Z Gross height	1940 mm
Net Weight	408,0 kg	Gross Weight	440,0 kg
Net volume	5,491 m3	Gross volume	7,349 m3

**ELECTRICITY TECHNICAL SPECIFICATIONS**

Electric power	1,050 kW
Voltage	400V - 3N
Electric frequency	50Hz

**GAS TECHNICAL SPECIFICATIONS**

Gas type	R-404A
----------	--------

**UNDERTAKEN TECHNICAL SPECIFICATIONS**

Three-phase +N 40V wiring	4X1,5 +T -6A
Drain 1 diameter	40





Catalogue  
**CATERING**

Chapter  
**REFRIGERATION**

Model  
**CMKP-202 S.P.CAL SUELO 400V 3N 50Hz**

19048107

04/03/2019

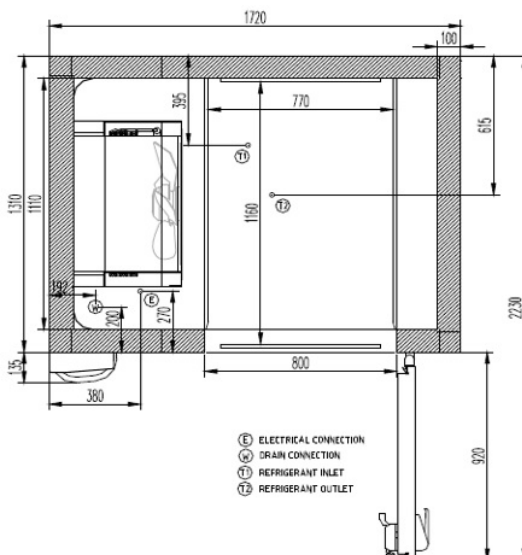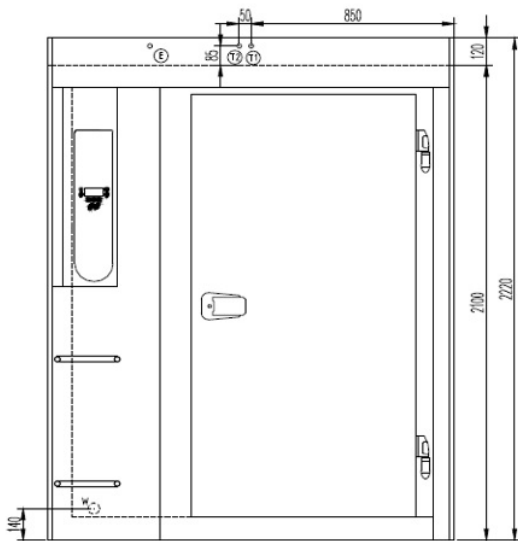

MODELO / MODEL		CMK-202	CMKP-202	
Dimensiones Exteriores External Dimensions	mm	1720x(1310+135)x2220	1720x(1310+135)x2220	
Dimensiones Interiores Internal Dimensions	mm	770x1160x1900	770x1160x1900	
Tipo Abatidor Type Blast Chiller		Mixto	Mixto	
Profundidad con puerta 90° Depth with 90° door	mm	2230	2230	
Clase Climática Climate class		T	T	
Espesor aislamiento Thickness	mm	100	100	
Medidas hueco puerta door opening measures	mm	1800x800	1800x800	
Ciclo refrigeración Chilling cycle	°C	+90/+3	+90/+3	
Ciclo Congelación Freezing cycle	°C	+90/-18	+90/-18	
Capacidad Abatimiento Chilling capacity	90'	Kg	150	210
Capacidad Congelación Freezing capacity	240'	Kg	100	135
Alimentación eléctrica Electric Power supply	V/-Hz	230/1-50/60	400/3N-50/60	
Intensidad Máxima Max. Absorbed current	A	2.6	4.5	
Potencia eléctrica Input electric Power	W	850	1100	
Dimensiones embalado Packing dimensions	mm	2310x1580x1920	2310x1580x1920	
Volumen bruto exterior Total Volume external	m³	7.1	7.1	
Peso Weigh	NETO/NET BRUTO/GROSS	Kg	420 440	420 440

GRUPPO REMOTO / REMOTE UNIT		UCC-842	UCC-1052
Potencia / Rated output	HP	7.5	10
Refrigerante / Refrigerant		R404A	R404A
Potencia Frigorífica / Refrigeration Capacity	W	10530	13580
Alimentación eléctrica / Electric power supply	V/-Hz	400/3N/50- 460/3N/60	400/3N/50- 460/3N/60
Potencia eléctrica / Input electric power	W	6500	8450
Intensidad Máxima / Max. Absorbed current	A	19.9	24.5
Peso / Weight	Kg	205	214
Dimensiones / Dimensions	mm	1450x850x785	1450x850x785
Dimensiones embalado / Packing Dimensions	mm	1570x955x890	1570x955x890

CONEXIONES / CONEXIONES		n° x mm²	3x2.5/ 5x4/ 5x1.5	5x2.5/ 5x4/ 5x1.5
Conexiones eléctricas / Cables electrical				
Línea de líquido / Liquid tubes	D (mm)		19mm- 3/4"	19mm- 3/4"
Línea de gas / Gas tubes	D (mm)		35mm- 1-3/8"	35mm- 1-3/8"