



Catalogue
CATERING
Chapter
REFRIGERATION

Model
 CSK-202D PAS S.P.CAL No 230V 1N 50/60Hz

19048097

04/03/2019

BLAST CHILLING CELL, CSK-202-D

SPECIFICATIONS

Pass-through blast chiller cell, with separate doors for entry and exit.


Inside and outside made of high quality austenitic stainless steel.
 70 mm thick isolation.
 Isolation by means of injected 40 kg/m³ polyurethane, 20 % above the market average and with a noticeable reduction in consumption.
 Forced draught cooling system with optimized air circulation.

Electronic and digital control of defrosting temperature.
 Opened door delay alarm.
 HACCP tracking system with alarm and temperature log. An optional printer can be installed to print data.
 Bottom: 2 mm thick steel bottom.

Ready to install with tropicalized remote cooling unit.
 Ready to install with hermetically sealed compressor/scroll/semi hermetic with ventilated condenser.
 Suitable to work at a room temperature up to 43 °C and 65% humidity.

Trolley size: 20 GN-2/1
 Production Kg/cycle of refrigeration: 150 Kg

DIMENSIONS



X Width	1670 mm	X Gross width	2310 mm
Y Depth	1395 mm	Y Gross depth	1640 mm
Z Height	2120 mm	Z Gross height	1940 mm
Net Weight	408,0 kg	Gross Weight	440,0 kg
Net volume	4,782 m ³	Gross volume	7,349 m ³

ELECTRICITY TECHNICAL SPECIFICATIONS

Electric power	0,850 kW
Voltage	230V - 1N
Amperage	3,3A
Electric frequency	50/60Hz

GAS TECHNICAL SPECIFICATIONS

Gas type	R-404A
----------	--------

COLD TECHNICAL SPECIFICATIONS

Climate class	3
---------------	---

UNDERTAKEN TECHNICAL SPECIFICATIONS

Single-phase 230V wiring	2X2,5+T - 4A
Three-phase +N 40V wiring	4X1,5+T - 4A
Drain 1 diameter	40





Catalogue
CATERING

Chapter
REFRIGERATION

Model
CSK-202D PAS S.P.CAL No 230V 1N 50/60Hz

19048097

04/03/2019

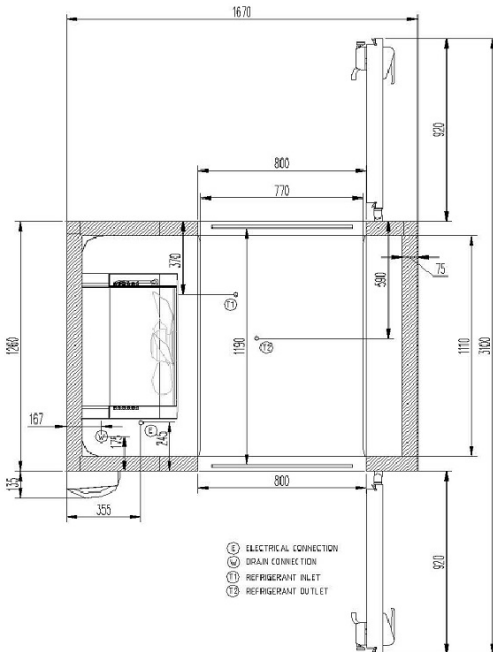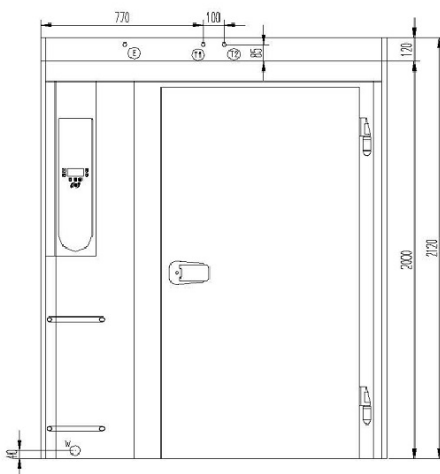

MODELO / MODEL		CSK-202 D	CSKP-202 D
Dimensiones Exteriores External Dimensions	mm	1670x(1260+135)x2120	1670x(1260+135)x2120
Dimensiones Interiores Internal Dimensions	mm	770x1190x1900	770x1190x1900
Tipo Abatidor Type Blast Chiller		Refrigeración	Refrigeración
Profundidad con puerta 90° Depth with 90° door	mm	3100	3100
Clase Climática Climatic class		T	T
Espesor aislamiento Thickness	mm	70	70
Medidas hueco puerta door opening measures	mm	1800x800	1800x800
Ciclo refrigeración Chilling cycle	°C	+90/+3	+90/+3
Capacidad Abatimiento Chilling capacity	90° Kg	150	210
Capacidad Abatimiento Chilling capacity	60° Kg	120	180
Alimentación eléctrica Electric Power supply	V/~Hz	230/1-50/60	400/3N-50/60
Intensidad Máxima Max. Absorbed current	A	2.6	4.2
Potencia eléctrica Input electric Power	W	850	1050
Dimensiones embalado Packing dimensions	mm	2310x1640x1940	2310x1640x1940
Volumen bruto exterior Total Volume external	m ³	7.1	7.1
Peso Weight	NETONET BRUTO/GROSS Kg	420 440	420 440
Suelo Ground		NO	NO

GRUPPO REMOTO / REMOTE UNIT		UCS-842	UCS-1052
Potencia / Rated output	HP	7.5	10
Refrigerante / Refrigerant		R404A	R404A
Potencia Frigorífica / Refrigeration Capacity	W	10530	13580
Alimentación eléctrica / Electric power supply	V/~Hz	400/3N/50- 460/3N/60	400/3N/50- 460/3N/60
Potencia eléctrica / Input electric power	W	6500	8450
Intensidad Máxima / Max. Absorbed current	A	19.9	24.5
Peso / Weight	Kg	205	214
Dimensiones / Dimensions	mm	1450x850x785	1450x850x785
Dimensiones embalado / Packing Dimensions	mm	1570x955x890	1570x955x890

CONNECTIONS / CONEXIONES			
Conexiones eléctricas / Cables electrical	nº x mm ²	3x2.5/ 5x4/ 5x1.5	5x2.5/ 5x4/ 5x1.5
Línea de líquido / Liquid tubes	D (mm)	19mm- 3/4"	19mm- 3/4"
Línea de gas / Gas tubes	D (mm)	35mm- 1-3/8"	35mm- 1-3/8"