



Catalogue
CATERING
Chapter
REFRIGERATION

Model
 CMK-202D PAS S.P.CAL SUELO 230V 1N 50/60

19048103

04/03/2019

MIXED BLAST CHILLING CELL, CMK-202-D

SPECIFICATIONS

Pass-through blast chiller and freezer cell, with separate doors for entry and exit.


Inside and outside made of high quality austenitic stainless steel. 100 mm thick isolation. Isolation by means of injected 40 kg/m³ polyurethane, 20 % above the market average, particularly for freezing performance and with a noticeable reduction in consumption. Forced draught cooling system with optimized air circulation.

Electronic and digital control of defrosting temperature. Opened door delay alarm. HACCP tracking system with alarm and temperature log. An optional printer can be installed to print data. Bottom: 100 mm thick bottom board with 40 kg/m³ injected polyurethane isolation.

Ready to install with tropicalized remote cooling unit. Ready to install with hermetically sealed compressor/scroll/semi hermetic with ventilated condenser. Suitable to work at a room temperature up to 43 °C and 65% humidity.

Trolley size: 20 GN-2/1
 Production Kg/cycle of refrigeration: 150 Kg
 Production Kg/cycle of freezing: 100 Kg

DIMENSIONS



X Width	1720 mm	X Gross width	2310 mm
Y Depth	1445 mm	Y Gross depth	1640 mm
Z Height	2220 mm	Z Gross height	1940 mm
Net Weight	408,0 kg	Gross Weight	440,0 kg
Net volume	5,491 m ³	Gross volume	7,349 m ³

ELECTRICITY TECHNICAL SPECIFICATIONS

Electric power	0,850 kW
Voltage	230V - 1N
Amperage	3,3 A
Electric frequency	50/60Hz

GAS TECHNICAL SPECIFICATIONS

Gas type	R-404A
----------	--------

COLD TECHNICAL SPECIFICATIONS

Climate class	3
---------------	---

UNDERTAKEN TECHNICAL SPECIFICATIONS

Single-phase 230V wiring	2X2,5+T - 4A
Three-phase +N 40V wiring	4X1,5 +T -4A
Drain 1 diameter	40





Catalogue
CATERING

Chapter
REFRIGERATION

Model
CMK-202D PAS S.P.CAL SUELO 230V 1N 50/60

19048103

04/03/2019

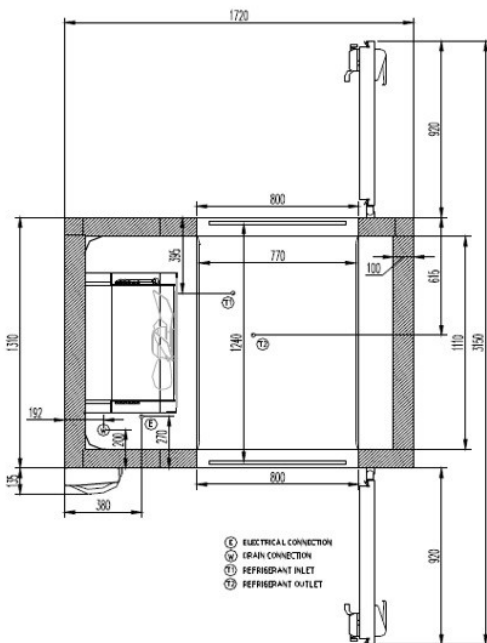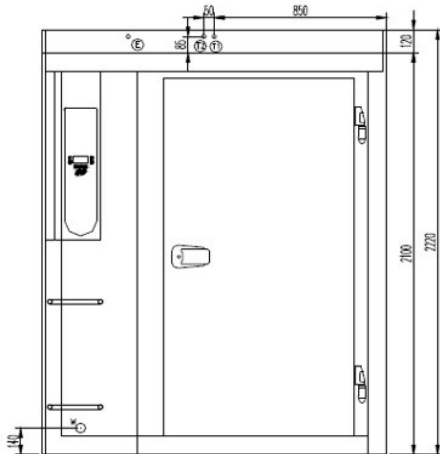

MODELO / MODEL		CMK-202D	CMKP-202 D
Dimensiones Exteriores External Dimensions	mm	1720x(1310+135)x2220	1720x(1310+135)x2220
Dimensiones Interiores Internal Dimensions	mm	770x1240x1900	770x1240x1900
Tipo Abatidor Type Blast Chiller		Mixto	Mixto
Profundidad con puerta 90° Depth with 90° door	mm	3150	3150
Clase Climatica Climatic class		T	T
Espesor aislamiento Thickness	mm	100	100
Medidas hueco puerta door opening measures	mm	1800x800	1800x800
Ciclo refrigeración Chilling cycle	°C	+90/+3	+90/+3
Ciclo Congelación Freezing cycle	°C	+90/-18	+90/-18
Capacidad Abatimiento Chilling capacity	90'	Kg 150	Kg 210
Capacidad Congelación Freezing capacity	240'	Kg 100	Kg 135
Alimentación electrica Electric Power supply	V/~-Hz	230/1-50/60	400/3N-50/60
Intensidad Maxima Max. Absorbed current	A	2.6	4.5
Potencia electrica Input electric Power	W	850	1100
Dimensiones embalado Packing dimensions	mm	2310x1580x1920	2310x1580x1920
Volumen bruto exterior Total Volume external	m ³	7.1	7.1
Peso Weigh	NETO/NET BRUTO/GROSS	Kg 420	Kg 420
		Kg 440	Kg 440

GRUPPO REMOTO / REMOTE UNIT		UCC-842	UCC-1052
Potencia / Rated output	HP	7.5	10
Refrigerante / Refrigerant		R404A	R404A
Potencia Frigorifica / Refrigeration Capacity	W	10530	13580
Alimentación eléctrica / Electric power supply	V/~-Hz	400/3N/50- 460/3N/60	400/3N/50- 460/3N/60
Potencia eléctrica / Input electric power	W	6500	8450
Intensidad Máxima / Max. Absorbed current	A	19.9	24.5
Peso / Weight	Kg	205	214
Dimensiones / Dimensions	mm	1450x850x785	1450x850x785
Dimensiones embalado / Packing Dimensions	mm	1570x955x890	1570x955x890

CONNECTIONS / CONEXIONES

Conexiones eléctricas / Cables electrical	n° x mm ²	3x2.5/ 5x4/ 5x1.5	5x2.5/ 5x4/ 5x1.5
Linea de líquido / Liquid tubes	D (mm)	19mm- 3/4"	19mm- 3/4"
Linea de gas / Gas tubes	D (mm)	35mm- 1-3/8"	35mm- 1-3/8"